



1. Montare la clip sulla staffa e uccessivamente posizionarla sul telaio. Mount the clip on the bracket and then placeit on the frame.

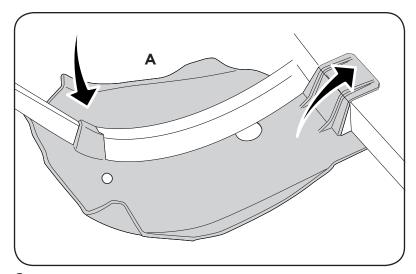

2. Assicurarsi che i ganci del sottomotore siano inseriti correttamente sul telaio Ensure that the clips of the skid plate are properly inserted on the frame.



3. Fissare il sottomotore alla staffa precedentemente installata, tramite bussola e vite in dotazione Secure the skid plate to the previously installed bracket, using the socket and screw supplied.

Use at your own risk. Check the security of your device before you ride. Be sure that you follow the instructions installing the Acerbis products. Do not ride if there is missing or damaged hardware. If this is the case, take the item immediately back to your dealer. Make sure the throttle and other controls are free every time you ride. Lack of attention to instruction and warning could lead to interference with the controls, loss of control, and an accidents. Acerbis recommends that installation must be done by a licensed mechanic and that only Acerbis is original parts are used during fitting. Acerbis makes no guarantees or representations, express or implied, regarding the fitness of its products for any particular purpose. Acerbis makes no guarantees or representations, express or implied, regarding the extent to which its product protect individuals or property from injury or death or damage.

ACERBIS ITALIA S.P.A. VIA SERIO, 37 - 24021 ALBINO (BG) - ITALY

Phone +39 035773577 - Fax +39 035773570 - INFOMOTO@ACERBIS.IT - WWW.ACERBIS.COM ACERBIS U.S.A. Inc.

MAIL P.O. BOX 2030 SUN VALLEY, ID 83353 SHIP 110 LINDSAY CIRCLE KETCHUM, ID 83340

Phone (800) 659-1440 - Fax (208) 726-7039 - INFOUSA@ACERBIS.COM UNIT 2 LUTON ENTERPRISE PARK SUNDON PARK ROAD LUTON. BEDFORDSHIRE LU3 3GU GREAT BRITAIN

ACERBIS U.K. Ltd

Phone +44 1582491076 - Fax +44 1582499639 - UKINFO@ACERBIS.IT