

X-POWER KTM SX 250 2T 17/18 - EXC 250/300 2T 17/19
X-POWER HUSQUARNA TC 250 2T 17/18 - TE 250/300 2T 17/19

ACERBIS®

COD. 500006082



A - (1 pcs)




B - (1 pcs)




C - (6 pcs)




D - (1 pcs)



E - (1 pcs)

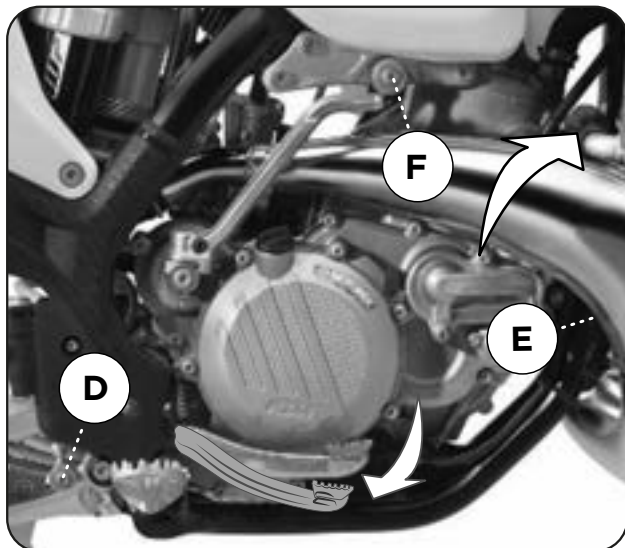


1 - To mount the X-Power, begin by unscrewing the D bolt and lowering the rear brake pedal. Unscrew the exhaust pipe bolts E and F and rotate the exhaust pipe upward.
 1 - Per facilitare il montaggio del X-Power svitare la vite D del pedale e abbassarlo. Svitare le viti E/F e far ruotare la marmitta verso l'alto.

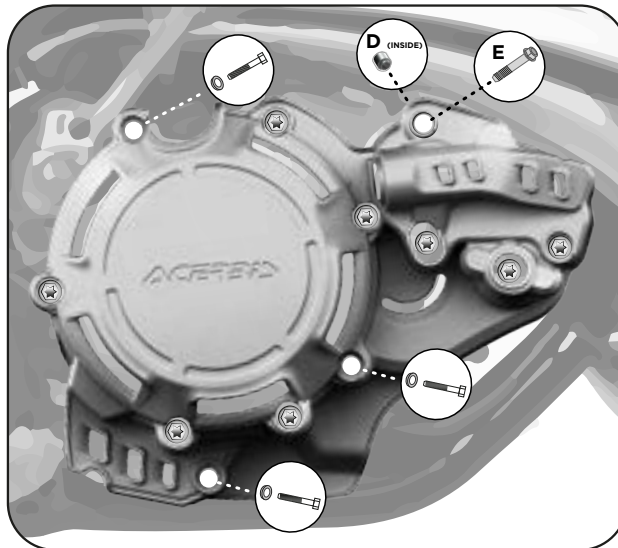

2 - Remove the 4 original clutch cover screws as indicated in the image. Insert the (D) bushing on the inside of the upper hole on the cover. Attach the X-Power clutch cover using the 3 original bolts, the (C) washers, and the (E) bolt as indicated in the image. Tighten to the Manufacturer's recommended torque settings as indicated in the owner's manual..

2 - Rimuovere le 4 viti originali nelle posizioni indicate in figura. Inserire all'interno del carter la boccola (D). Montare la protezione frizione X-Power con le 3 viti originali, le boccole (C) e la vite (E) in dotazione. Riposizionare il pedale, la marmitta, e riavvitare le viti D/E/F. Coppia di chiusura come riportato su manuale moto.

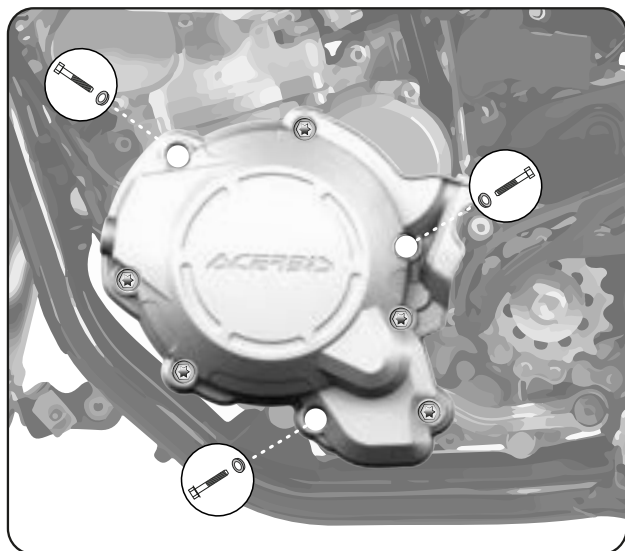

3 - To mount the X-Power Ignition cover, begin by removing the 3 OEM bolts as indicated in the image. Place the X-Power cover over the ignition cover and attach using the 3 stock bolts and (C) washers. Tighten to the Manufacturer's recommended torque settings as indicated in the owner's manual. .

3 - Rimuovere le 3 viti originali indicate in figura. Montare la protezione accensione X-Power con le viti originali e le 3 boccole C. Coppia di chiusura come riportato su manuale moto.

WARNING!

Use at your own risk. Check the security of your device before you ride. Be sure that you follow the instructions installing the Acerbis products. Do not ride if there is missing or damaged hardware. If this is the case, take the item immediately back to your dealer. Make sure the throttle and other controls are free every time you ride. Lack of attention to instruction and warning could lead to interference with the controls, loss of control, and an accidents. Acerbis recommends that installation must be done by a licensed mechanic and that only Acerbis is original parts are used during fitting. Acerbis makes no guarantees or representations, express or implied, regarding the fitness of its products for any particular purpose. Acerbis makes no guarantees or representations, express or implied, regarding the extent to which its product protect individuals or property from injury or