

ACERBIS PARTS





A - (1 pcs.)




B - (1 pcs.)



C - (7 pcs.)

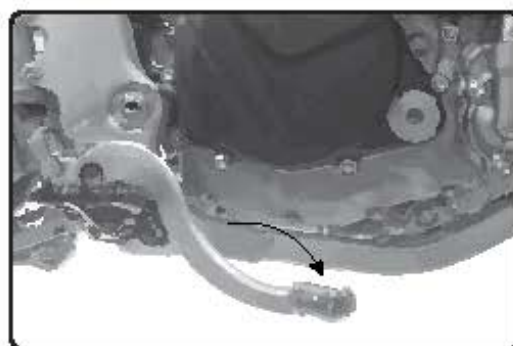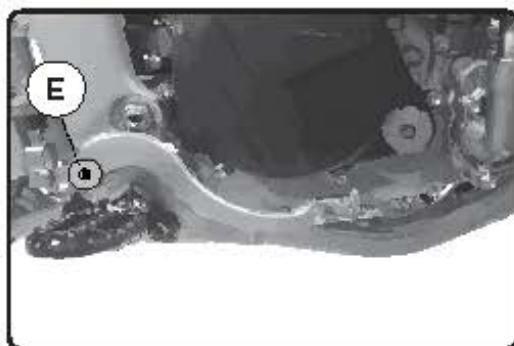


**1 - To mount the X-Power Clutch cover, begin by unscrewing the Brake pedal bolt (E) as illustrated in the image.**  
1- Per facilitare il montaggio del X-Power, togliere il pedale svitando la vite E.

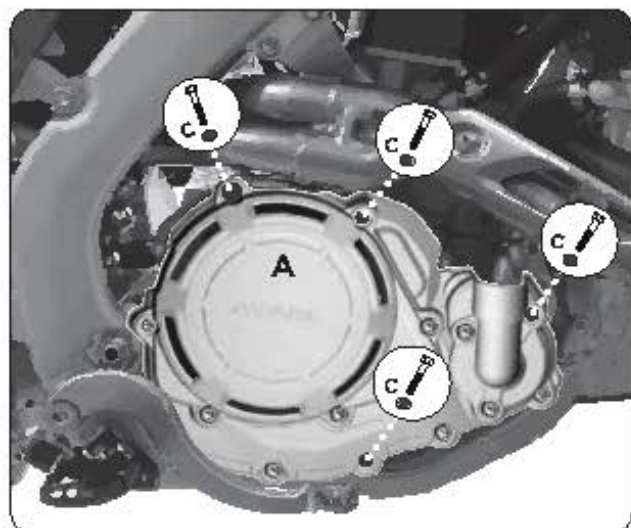

**2 - Attach the X-power cover (A) using the original bolts and the included bushings (C). Then, re-connect the rear brake pedal by re-inserting the brake pedal bolt (E).**

2- Montare la protezione frizione X-Power (A) con le viti originali e le boccole in dotazione (C). Riposizionare il pedale e rimettere la vite (E).

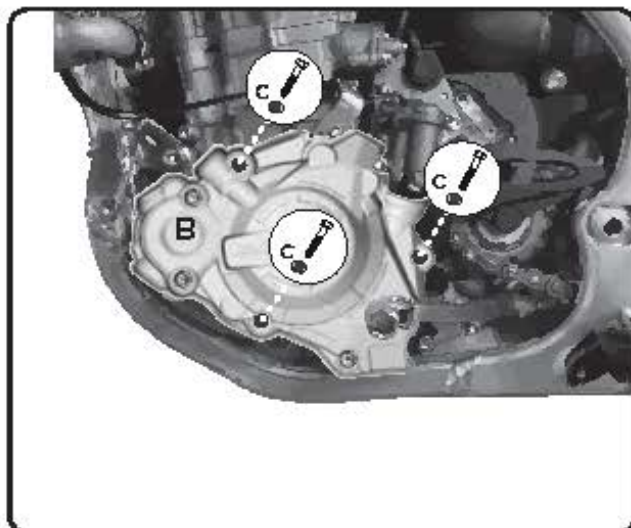

**3 - Lower the gear lever (entering 1st gear). Then install the X-Power cover (B) using the original bolts and the bushings (C).**

3- Abbassare la leva del cambio (inserendo la 1° marcia). Montare la protezione accensione X-Power (B) con le viti originali e le boccole (C).

**WARNING!**

Use at your own risk. Check the security of your device before you ride. Be sure that you follow the instructions installing the Acerbis products. Do not ride if there is missing or damaged hardware. If this is the case, take the item immediately back to your dealer. Make sure the throttle and other controls are free every time you ride. Lack of attention to instruction and warning could lead to interference with the controls, loss of control, and an accident. Acerbis recommends that installation must be done by a licensed mechanic and that only Acerbis original parts are used during fitting. Acerbis makes no guarantees or representations, express or implied, regarding the fitness of its products for any particular purpose. Acerbis makes no guarantees or representations, express or implied, regarding the extent to which its product protect individuals or property from injury or death or damage.